

UpRight
XRT 27/33
27E/33E

Scissor lifts

electric-diesel-dual fuel rough terrain

Working height up to
39ft. (12.1m)

Driveable fully elevated
with deck extended

Standard 39in. roll-out
deck extension

Passes through standard
double doorway

One-hand
proportional control

High capacity
steel platforms

Sheet material loading
system on platform

Standard AC outlet
at platform

Easy access service
modules

On board diagnostic
system


Five year
structural warranty



Photograph shown CE model

specifications	XRT27/33	XRT27/33E
working height (A)	33ft. (10.2m)* / 39ft. (12.1m)*	33ft. (10.2m)* / 39ft. (12.1m)*
platform height (max.) (B)	27ft. (8.2m) / 33ft. (10.1m)	27ft. (8.2m) / 33ft. (10.1m)
drive height (max.)	27ft. (8.2m.) / 33ft. (10.1m.)	27ft. (8.2m.) / 33ft. (10.1m.)
platform capacity (max.)	1,250lbs. (567kg.) / 1,000lbs. (454kg.)	1,250lbs. (567kg.) / 1,000lbs. (454kg.)
platform size	58ins. x 131ins. (1.5m. x 2.34m.)	58ins. x 131ins. (1.5m. x 2.34m.)
width (C)	69.5ins. (1.77m.)	69.5ins. (1.77m.)
length (D)	106ins. (2.69m)	106ins. (2.69m.)
overall height	100ins. (2.54m.) / 106ins. (2.69m.)	100ins. (2.54m.) / 106ins. (2.69m.)
stowed height - rails folded (E)	71ins (1.83m.) / 76ins (1.93m.)	72ins (1.83m.) / 77ins (1.95m.)
weight	7,000lbs. (3,175kg.) / 8,170lbs. (3,706kg.)	7,275lbs. (3,300kg.) / 8,375lbs. (3,799kg.)
inside turning radius	68ins. (1.72m.)	90ins. (2.28m.)
control system	One hand proportional control	One hand proportional control
gradeability	40% (22°) / 35% (19°)	40% (22°) / 35% (19°)
lift speed raise/lower	34-34 secs. / 31-31 secs.	40-34 secs. / 39-31 secs.
drive axle	4 wheel hydraulic motors or dual 48V rear traction motors	
energy source	Kubota D905E W/C diesel / Kubota DF750 W/C gas / LPG	8 x 6V 220Ah batteries
tires	26 x 12 - 10 ply	G78-15 - 10 ply, poly-filled
ground clearance	7ins. (178mm.)	7ins. (178mm.)
toeboards	6ins. (152mm.)	6ins. (152mm.)

*Working height in the U.S. is 6 ft. above platform height. Metric working height is 2m above platform height.
 Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only.
 Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment.

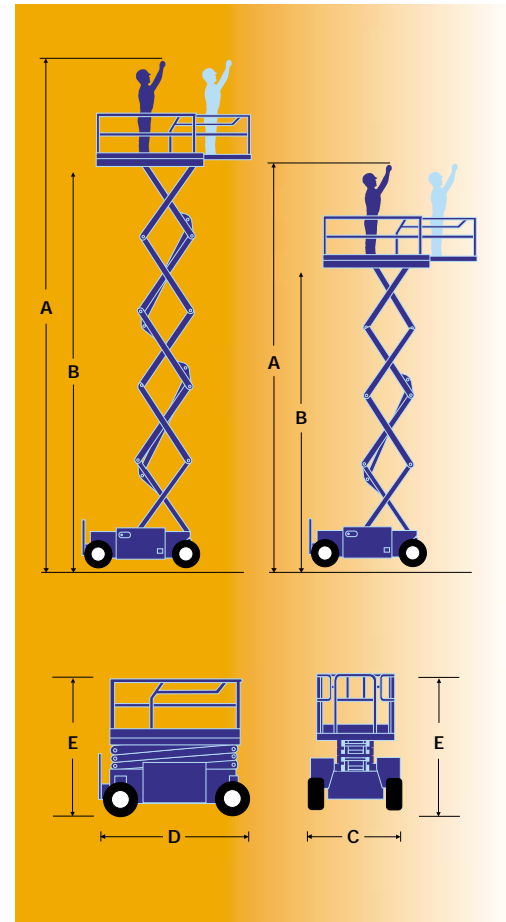


standard features

- Roll-out deck extension
- Proportional controls
- 21 amp battery charger
(Electric models only)
- Hour meter
- Battery charge indicator at platform
(Electric models only)
- Power to platform
- Descent alarm
- Tilt alarm
- Poly-filled tires
- 1 year parts/service
- 5 year structural warranty

options

- 2000 watt / 110 AC generator
(XRT 27/33 models only)
- Air line to platform
- Flashing amber beacon
- All motion alarm
- Removable controller
- Non-marking tires
(Electric models only)
- Poly-filled rough terrain tires
(Electric models only)
- Horn
- Diesel exhaust scrubber
(XRT 27/33 models only)
- Special paint colors
- Environmental green oil



manufactured by
UpRight

UpRight

www.upright.com
 e-mail: marketing@upright.com

GLOBAL PROVIDER OF ACCESS SOLUTIONS

MANUFACTURING

North America
 Tel +1 (559) 662 3900
 Fax +1 (559) 673 6184

Europe
 Tel + 353 1 620 9300
 Fax + 353 1 620 9301

SALES

USA / The Americas
 Tel +1 (559) 662 3900
 Fax +1 (559) 673 6184

Europe/Africa/M. East
 Tel + 44 (0) 1952 685 200
 Fax + 44 (0) 1952 685 255

France
 Tel + 33 130 37 05 44
 Fax + 33 130 37 63 68

Germany
 Tel + 49 2103 98950
 Fax + 49 2103 989549

Singapore
 Tel + 65 6324 1322
 Fax + 65 6225 5157

Australia
 Tel + 61 2 9748 6200
 Fax + 61 2 9748 6255

P. R. China
 Tel + 86 21 63390190
 Fax + 86 21 63390191

Japan
 Tel + 81 3 5765 6841
 Fax + 81 3 5765 6840

